


C15 - DUAL RELAY BOARD

Rev 1

WIRING DIAGRAM

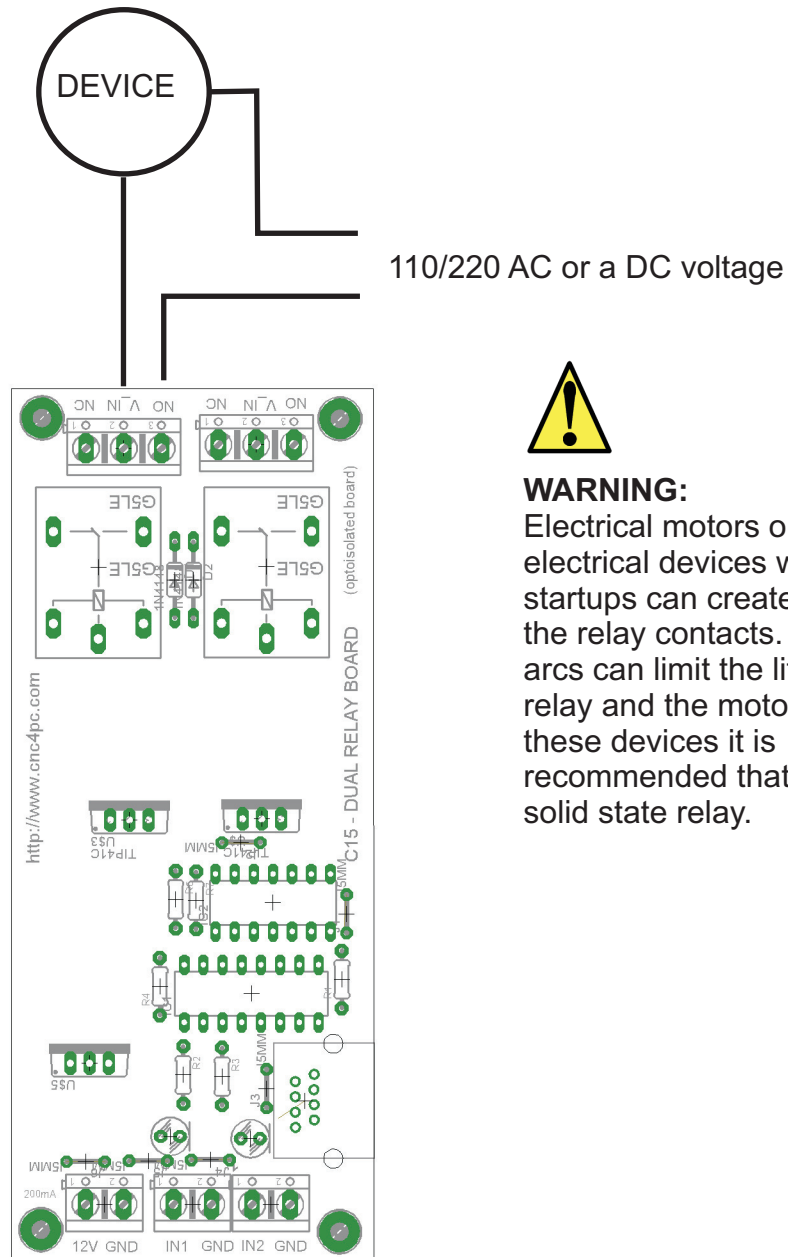

WARNING:

Electrical motors or other electrical devices with abrupt startups can create arcs in the relay contacts. These arcs can limit the life of the relay and the motor. For these devices it is recommended that you use a solid state relay.

POWER CONNECTIONS:

A +12 vdc external power source must be used to power the board.

||
+3.3 - 5VDC AT 10
MILLIAMP SIGNAL FROM
PARALLEL PORT OR
BREAKOUT BOARD