

**WEIHAO**

SWITCHING POWER SUPPLY

伟豪开关电源

www.wehpower.com

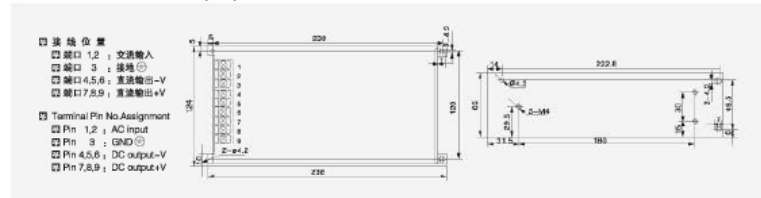
**S-600W单组输出电源**  
S-600W Single output power supply**概述 Summary**

- > 单组输出：功率600W  
Single output: power 600W
- > 输入电压：90 ~ 132VAC/180 ~ 264VAC 由开关切换  
Input voltage: 90 ~ 132VAC/180 ~ 264VAC by switch

**常见规格 General Specification**

238 x 124 x 65mm

性能 Specification	型号 Model	S-600-12	S-600-24	S-600-36	S-600-48
直流输出电压、电流 DC output voltage, current		12V 0~50A	24V 0~25A	36V 0~16.7A	48V 0~12.5A
纹波及噪音 Wave and noise		100mVp-p	150mVp-p	150mVp-p	150mVp-p
纹波稳定性 Inrit wire stability		±0.5%	±0.5%	±0.5%	±0.5%
负载稳定性 Load stability		±0.5%	±0.5%	±0.5%	±0.5%
效率 Efficiency		83%	85%	86%	87%
直流电压可调范围 Adjustable range for DC voltage		±10%	±10%	±10%	±10%
输入电压范围 Input voltage range		90 ~ 132VAC/180 ~ 264VAC 由开关切换 254 ~ 370VDC 47 ~ 63Hz 90 ~ 132VAC/180 ~ 264VAC by switch 254 ~ 370VDC 47 ~ 63Hz			
冲击电流 Impact current		冷启动电流 25A/115VAC 50A/230VAC Cold start current			
过载保护 Overload protection		105% ~ 300% 切断输出, 自动恢复 105% ~ 300% cut off the output, automatic recovery			
过电压保护 Over voltage protection		115% ~ 140% 关闭输出, 电源重启后可恢复输出 115% ~ 140% shut down O/P voltage, re-power on to recover			
启动、上升、保持时间 Setup, rise, hold up time		600ms, 20ms, 36ms/230VAC 满载 at full load			
耐压性 Withstand voltage		输入输出间: 1.5kV 输入与外壳间: 1.5kV 输出与外壳间: 0.5kV 一分钟 I/P-O/P: 1.5kV I/P-FG: 1.5kV O/P-FG: 0.5kV 1minute			
隔离电阻 Isolation resistance		输入输出间 输入与外壳间 输出与外壳间: 500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ			
工作温度 Working temperature		-10°C ~ +50°C			
尺寸 Dimension		238 x 124 x 65mm			
重量 Weight		1.5kg			
包装 Packing		44 x 26 x 27CM/12PCS/18kg			

**外形尺寸 Overall dimension(mm)****WEHO****SE-600W单组输出电源**  
SE-600W Single output power supply**概述 Summary**

- > 单组输出：功率600W  
Single output: power 600W
- > 输入电压：90 ~ 132VAC/180 ~ 264VAC 由开关切换  
Input voltage: 90 ~ 132VAC/180 ~ 264VAC by switch

**常见规格 General Specification**

247 x 127 x 63.5mm

性能 Specification	型号 Model	SE-600-5	SE-600-12	SE-600-24	SE-600-48
直流输出电压、电流 DC output voltage, current		5V 0~100A	12V 0~50A	24V 0~25A	48V 0~12.5A
纹波及噪音 Wave and noise		150mVp-p	150mVp-p	150mVp-p	180mVp-p
纹波稳定性 Inrit wire stability		±0.5%	±0.5%	±0.5%	±0.5%
负载稳定性 Load stability		±1%	±0.5%	±0.5%	±0.5%
效率 Efficiency		78%	83%	87%	88%
直流电压可调范围 Adjustable range for DC voltage		±10%	±10%	±10%	±10%
输入电压范围 Input voltage range		90 ~ 132VAC/180 ~ 264VAC 由开关切换 254 ~ 370VDC 47 ~ 63Hz 90 ~ 132VAC/180 ~ 264VAC by switch 254 ~ 370VDC 47 ~ 63Hz			
冲击电流 Impact current		冷启动电流 30A/115VAC 50A/230VAC Cold start current			
过载保护 Overload protection		105% ~ 150% 切断输出, 自动恢复 105% ~ 150% cut off the output, automatic recovery			
过电压保护 Over voltage protection		120% ~ 140% 关闭输出, 电源重启后可恢复输出 120% ~ 140% shut down O/P voltage, re-power on to recover			
启动、上升、保持时间 Setup, rise, hold up time		1000ms, 50ms, 16ms/230VAC 满载 at full load			
耐压性 Withstand voltage		输入输出间: 1.5kV 输入与外壳间: 1.5kV 输出与外壳间: 0.5kV 一分钟 I/P-O/P: 1.5kV I/P-FG: 1.5kV O/P-FG: 0.5kV 1minute			
隔离电阻 Isolation resistance		输入输出间 输入与外壳间 输出与外壳间: 500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ			
工作温度 Working temperature		-10°C ~ +50°C			
尺寸 Dimension		247 x 127 x 63.5mm			
重量 Weight		2.17kg			
包装 Packing		37.5 x 31 x 25.5CM/6PCS/13.5kg			

**外形尺寸 Overall dimension(mm)**